

## Infrared Interactive Flat Panels

ITATOUCH adopt the updated Infrared multi-touch technology 10~40 points, finger, any object touch

Android 14.0 OS IOS with 4GB /8GB RAM and 32GB /128GB Storage, set dual system, infrared touch, option 13 /48megpixels UHD 4K Camera (Al option) , and 8-array Microphone.

It supports 4 users at the same time (standard, 9 users option) to share screens and scan the QR code with your mobile phone to access the file link and save the file.

It takes learning to new heights while being easy on the eyes. Perfect for conference multimedia presentations, interactive lesson plans, or

SMART INTERACTIVE WHITEBOARD 55", 65", 75", 86", 98", 110"



#### **Product Highlights**



#### Smooth Writing

Adapot the latest IR tech, the whiteboard app allows users to smoothly write, draw, and erase on-screen through touch by any objects



## Intelligent Recongnize

Infrared Intelligent gesture recognition, the interactive digital board offer users zoom in / out with gestures, and erase on the screen



#### Eye-protection

The interactive screen has a filter to effectively reduce blue light so your eyes remain comfortable even when using the display for longer periods



## Professional Design

Our smart boards interactive has perfect appearance with professional design, the frame looks seamless and highly classical



## 4K Display

The original screen panel with A-class quality and 3840\*2160P resolution, and NTSC>72%, offer users with a clear and vivial reviewing



#### Stereo Sound

Embedded dual-channel Dolby sound the interactive panel will give the users and audiences a cinematic audio-visual experience



#### Auto-adjust Brightness

built-in light sensor system, the interactive boards can automatically adjust the screen brightness per working envirnments



#### Zero Bonding Tech

The advanced zero bonding technology which makes the IFP have a touch sensor more accurate, and dual-face antiglared treatment







## **SPECIFICATIONS:**

## Model# HT-65D S Series

## **LCD Panel Parameter**

Sizes	65inch
Screen Panel Type	D-LED/ IPS Screen
Assembled Tech	Zero Bonding
Display Area	1428.48*803.52mm
Resolution	3840*2160
Display Rate	16:9
Brightness (type)	>= 350 cd/m²
Contrast	4000:1 / 1200:1 (IPS)
Pixel (mm)(H/V)	0.372×0.372 [68PPI]
Reviewing Angle	178°(H) / 178°(V)
Refresh Rate	60Hz
Colorful	10bit,10.7B
%NTSC	>72% NTSC (Standard), 90% NTSC (Option)
HDR	Support
Response time	≤6ms
Lifetime	Above 40,000 hrs

## **Android System**

Android OS	Andriod 14.0 OS , mainboard #V100 ( GK6760V100 /GK6780V100)
Android CPU	the flagship 8-core A55 CPU the main frequency up to 1.2GH
Android GPU	Quad-core MaliG52, 600MHz
Flash Nandi EMMC	128GB
RAM DDR3	8GB
Input Resolution	1920*1080/30Hz, 3840*2160/60Hz; 3840x2160@120Hz (Option)

## Connectivity

Front Button

Conne	ctivity	
Backside	Ports	RJ45 ln x1
		RS232 x1
		Earphone x1
		Coax x1
		TF x1
		HDMI In x1
		HDMI In(eARC) x1
		TOUCH USB x1
		Public USB2.0 x1
		Public USB3.0 x1
		VGA x1
		VGA Audio In x 1
Option	Option	HDMI out x1
	DP In x1	
		RJ45 Out x1
		MIC In x1
		Optical x1
Front Ports		USB3.0 x2
		HDMI In x1
		TOUCH USB x1
		Type-C x1

Buttons x7 (standard)

## Camera/Audio/Microphone (Optional)

Carriera, / taaro, iviit	or optionally
Camera	13MP Megapixels
	Option: 48MP Megapixels, 110° FOV
	Al function(option): Automatical voice tracking
Video Recording	3840*3024(4K); 60Hz
Microphone	8-array Microphone
Mic Pick Up Range	0 ~ 6 meters
Speaker Output Power	Standard: 2*15W; 1x20W Subwoofer (option)
NFC	Near to connectivity

#### Network

LAN	10/100M auto-identification and DHCP	
WIFI	WiFi4 2.4G; WiFi5 2.4G+5G(option)	
Bluetooth (Option)	Bluetooth 5.0	

## **Light Sensor System**

Pin hole light sensor on the frame, auto adjust the screen birghtness

## **PC Connectivity**

## **Power**

Power Supply	AC200V to AC264V; , Magmet power board	
Consumption (standby)	<0.5W	
Consumption (max)	180W	

Spec subject to change / Jul, 2024 Email: info@itatouch.com



## **Android Software**

3 pen styles & 2 intelligent brushes that can convert your handwriting into printed text/ pattern
Annotation, insert picture, table, all kinds of shapes, chart drawing, video, and signal source
Scan QR to share screens under Whiteboard APP
Scan to download app for mirror screens between Android / IOS OS
Option: the dongle to support Windows PC mirroring
Camera, Votekit, Timer, Stopwatch, Cutdown Record, Screenshot, Easy Upload, Gallery
Freezing, Split Screens
Play store (user can download the other APPs from Google)
Support multipe languages: english, france, spanish, arabic ···

## **Touch Technology**

Touch Technology	Infrared touch technology with high accuracy , finger or any object touch
Touch Glass	4mm tempered glass, hardness>7H; dual-face anti-glared treatment
Touch Points	40 touch points, 20point writing
Touch Accuracy	3mm +/-
Resolution	32768*32768
Response time -single point	<=6ms
Touch refersh rate	>=140fps
Touch interface	USB
Support OS	Support WINDOWS /LINUX /MAC /Android
Touch times	above 6000millions times at same point

## **Physical**

Frame Color	Deep Blue /Sliver /Black
Shell Materials	Aluminum frame
	Metal backside
Product Size	1483.8*886.9*115.8mm
Package Size	1615.8*220*1012mm
Net Weight	43Kg±1Kg
Gross Weight	53Kg±1.5Kg
VESA	500x400mm

## What's in the carton

Touch Pen	x2, magnetic pen
HDMI Cable	x1, 1.5m length
USB Cable	x1, 1.5m length
Power Cable	x1, 1.5m length
Remote Control	x1, English language
Wall mout	x1, installation screws
Interactive Display	x1, packing with plastic bag, foam inside carton


#### **Environments**


Temperature	Working: 0°C to 40°C;
	Storage :-20°C to 60°C;
Humidity	10%-90% RH at 40°C,
	non-condensing
Working Time	24/7 hours working

## Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document

## **Dimensions:**








## **PRODUCT DETAILS**


#### Perfect Design

The overall design of our interactive panels is seamless, with a touch of sophistication. The materials used are first class Ensures durability and a premium feel. Clean interface, making it easy to Catch people eyes

#### Variable Configuration

Our interactive panels boast cutting-edge technology
With powerful processor ensures smooth and lag-free performance
User can select the configuration per actual Requirements

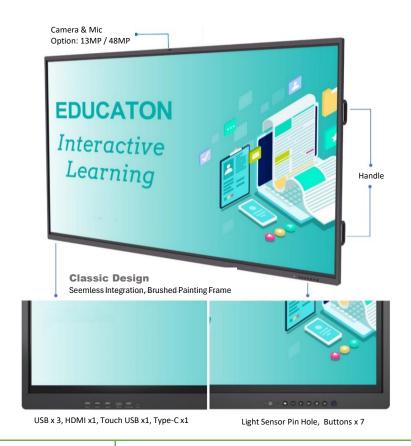

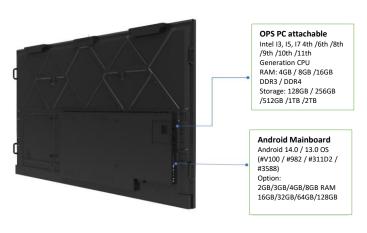

Wireless Mirror Dongle



Video meeting, conference, school teaching, User can select it per actual requirements.

Attention: Above pictures just for reference, all subject to the actual device

#### **BASIC OPTIONAL:**

Dongle	Mirror dongle for Windows OS
OPS PC	Intel I3/ I5 / I7, the configuration to be customized
Mobile Stand	floor stand to support 55" ~110" interactive screens
Electric Stand	Electric Flip Stand / lift Stand to support 55" ~110" intractive panels
Manual Lift Device	Manual lift deice to support 55" ~110" interactive tvs



#### **OPS PC**


User can customize OPS PC per actual requirements, the configuration as the following

#### Intel® OPS-C Configuration

Processor	Intel I3, I5, I7, 4th/ 6th/ 7th/ 8th/ 9th /10th /11th GEN CPU
Chipset	Intel® HM86, H110, H310C, Z390
Memory	4GB / 8GB /16GB /32GB DDR3/DDR4
Storage	128GB / 256GB / 512GB / 1TB /2TB SSD / HDD SATA interface
Graphics	Intel® Integrated High Performance Graphics
WIFI	1 x M.2 2230 PCle/USB interface / Bluetooth
LAN	Intel® i219V Gigabit Ethernet NIC
Sound card	ALC269 sound decoding chip
OS	Window 10 /11 OS (copy version); Linux OS

#### **Dimension**

#### 195 x 180 x 30 mm /42mm



#### **Power**

12~19V 4.74A DC input, maximum 90 watts



#### Standard I/O (It's for the CPU above 10th GEN)

Standard I/O	( It's for the CPO above Toth GEN )
	1x OPS 80-pin interface
	1 x 3.0 Type-C port
	1 x Power LED+HDD LED
	6 x USB3.0 Type-A ports
	1 x Gigabit Ethernet port
	1 x 3.5mm audio output interface
	1 x 3.5mm audio input jack
	1 x HDMI1.4 display port
	1 x System Recovery Button
	1 x DP1.2 display interface
	1 x reset/clear CMOS button
	1 x switch button
	2 x Antennas


#### **Environments**

Working temperature: -10°C~50°C
Working humidity: 10%~90%, non-condensing
Storage humidity: -20°C~70°C

## The Actual Interfaces:



## FREE WHITEBOARD SOFTWARE

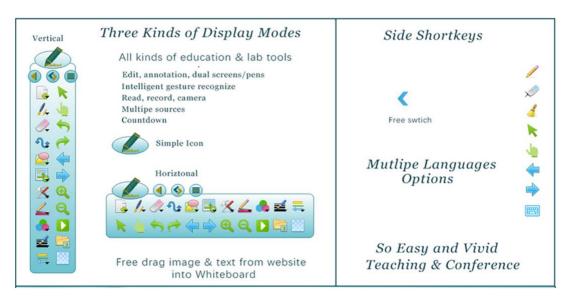



#### WHY CHOOSE US?

## Patient & Various Service

Directly factory offer with OEM, ODM, and SKD brand products Even 1pcs support also

You will get a reply within 24~48 hours for any inquiries

#### Serious Quality Control

Original screen, Dust-free workshop assembling, 24~48 hours aging One by one inspection before the goods packing CE. ROHS. ISO. FCC Document certificate

## Non-worried Shipment

We will assitant you to arrange well transportation per your requiremnts. include shipping cost comparing check, wooden pallet settled, EXW, FCA, FOB, CFR CIF, DAP, DDP ... terms

# Lifetime Technical Support

throughout the duration of your warranty and even after your warranty has expired we are here to support you. anytime we can provide free technical support by online, tel, and email.

## **Extended** Warranty

Usually the interactive display come with 1 year commercial warranty as standard but if you want to extend this you can upgrade this to over a 3~5 year period at point of purchase.

## Advanced Replacements

With along the bulks together, we will offer 1% spare parts to you in case any of the faulted parts. free charge replacement during warrany.

# Witness of Global Clients

Our products and service have been gotten " Good | Very Good " reviews by above 99% of clients from more than 30 countries and areas.

## **THANK YOU**

Tel: +86 13582949978 Email: info@itatouch.com Website: https://www.itatouch.com https://www.hitatouch.com

## Let's grow together to be top suppliers in the industry!

We are willing to do more works to provide greater service and lower the cost of customers. Customer's benefits always come first. Be positive to work, willing to help, share the responsibility and achievement of our team

